PRODUCT BRIEF

OSCILLOSCOPE PROBING SOLUTIONS

RSH1
Remote Sampling Head

Clean Probing of Parallel Buses



Ten Active Probes Integrated Into a Clean, Shielded Form Factor

Introspect's multi-conductor MIPI probe solution provides a simple connectorized interface for easy attachment to 4-lane MIPI D-PHY buses. Where multiple probes can result in a messy and tedious workspace, or where signals are in hard-to-reach areas, this remote sampling head enables a super clean signal probing setup.


KEY FEATURES:

- **Active Probing Solution**: high input impedance and active signal amplification
- **Shielded From EMI Issues**: all active components are shielded from external electromagnetic signals
- **Standard 50 Ohm Coaxial Output Interface**: compatible with any 50 Ohm instrument

KEY BENEFITS:

- **Minimized Loading**: especially useful for low-voltage applications such as MIPI or embedded DisplayPort
- **Low Noise**: enables high-reliability protocol analysis or bit error rate testing
- **Multiple Connection Modes**: permanent or temporary attachment to DUTs

Typical Application: Form Factor Probing of MIPI-Based Designs

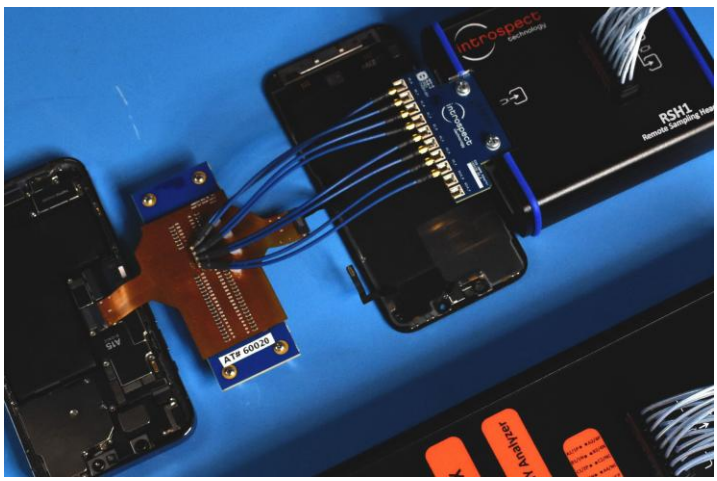


© Introspect Technology, 2026. Published in Canada on 2026/10/30 MK-D037E-E-26303

KEY PERFORMANCE PARAMETERS

PARAMETER	VALUE	DESCRIPTION
Rise Time	62 ps	20%-80% value
Linearity	50 dB	Spurious free dynamic range measured at 5 MHz and across entire voltage range
Standard Solder-In Tip		
Input Impedance	700 Ω	
Linear Range	-0.4 V to 0.6 V	
Maximum Voltage Range	-1.5 V to 1.8 V	

Obtain the Most Pristine High Fidelity Signal Measurements with the RSH1 Remote Sampling Head

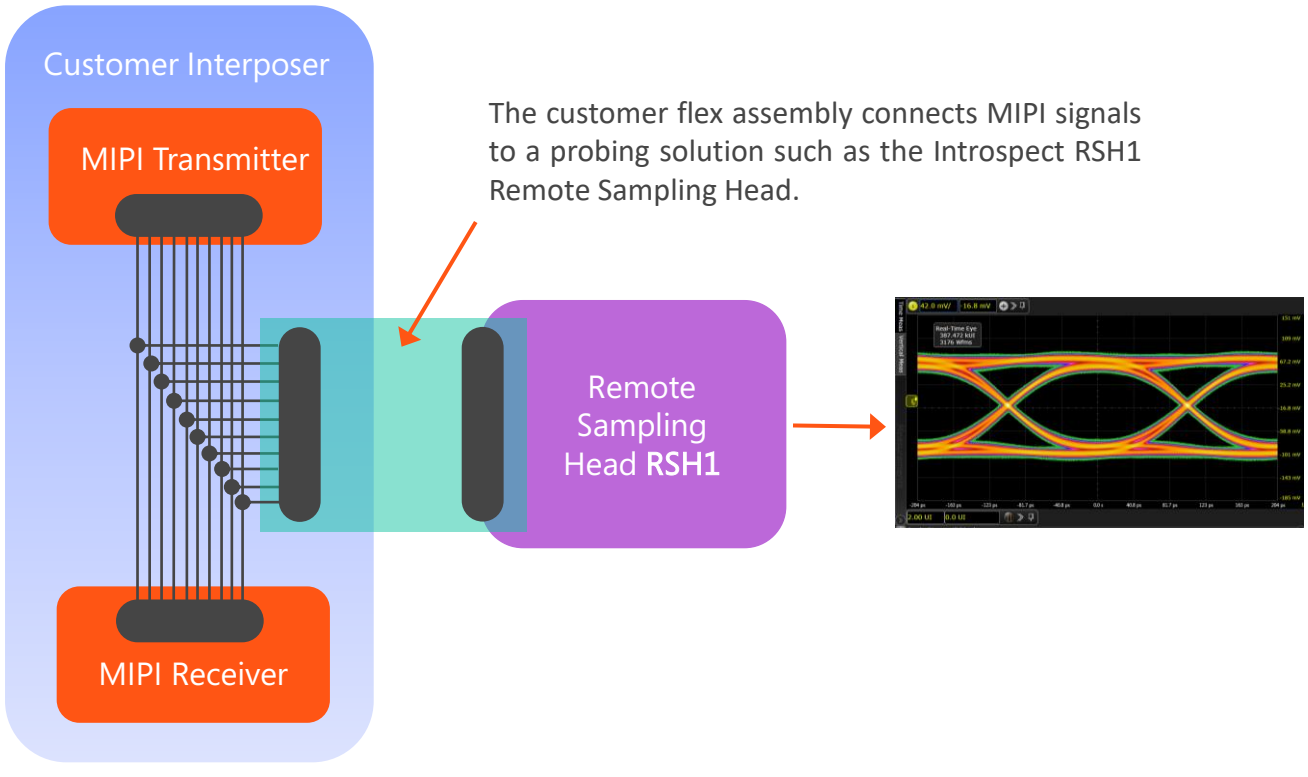

Connecting MIPI Signals to RSH1

TO LEARN MORE, SEND US AN EMAIL AT INFO@INTROSPECT.CA

© Introspect Technology, 2026. Published in Canada on 2026/10/30 MK-D037E-E-26303